

# NL-512-4



## APPLICATIONS



## LAMP SUITABILITY



## DIMENSIONS

### Luminaire

Max. Ht. 800mm	Max. Dia. 600mm	Column. Ht. 3000mm
----------------	-----------------	--------------------

## ORDER CODE

LUMINAIRE CODE	LAMP TYPE	OPTICS
NL-512-4-70MH-1P36	70 Watts MH-G12	Wide Sym
NL-512-4-150MH-1P36	150 Watts MH-G12	Wide Sym
COLUMN CODE	HEIGHT	
NL-C3-B12-P3114-PER-PU	3000mm	

## MOUNTING SUITABILITY

Pedestal Mounted

## DESCRIPTION

### 'NOVA'

#### DECORATIVE LANDSCAPE LUMINAIRE

Luminaire comprises heavy MS housing, duly fabricated and precision finished, PU-Painted.

Integral control gear comprising heavy duty Ballast, Electronic solid state Ignitor, PF Capacitor and lamp holder all duly wired.

The Optical Compartment comprises a high efficiency reflector for wide beam distribution.

Top Canopy made off Spun Aluminum / FRP for long life.

Indirect reflector provides wide area lighting distribution. Heat resistant toughened glass diffuser mounted through insect resistant gasket.



## DESCRIPTION-COLUMN

Lighting Column made of 10 swg MS pipe sections, duly machined, welded and stress relieved for long service life. Column is provided with a heavy base plate duly welded and provided with ornamental welded rib supports for stability.

An integral Junction Chamber with 6 Amps SP MCB and 4 way 10 sq mm connector block.

Column and luminaire are fine surface finished, primed, buffed and painted with PU based automotive paint to ensure long service life.

Column is perforated and provided with opal acrylic diffuser, incorporating 1 No 36 Watts CFL Lamp.

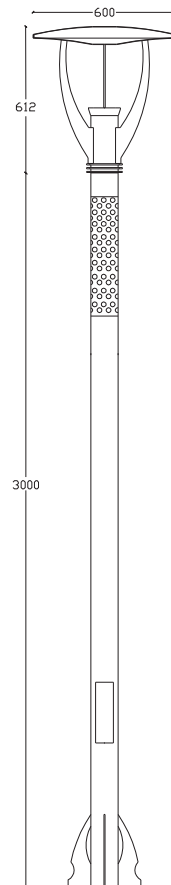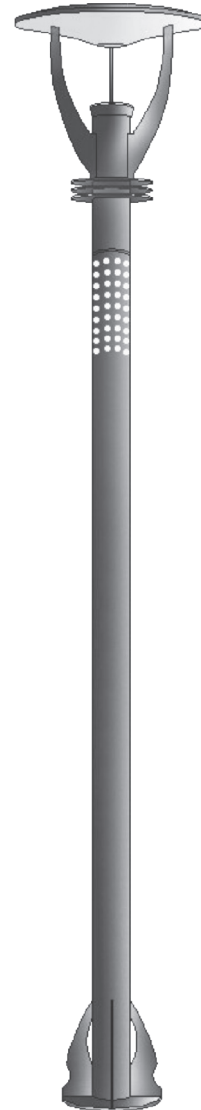

## NOTE

Luminaire is offered SEPARATLY as well as with coordinated decorative column. Please specify your requirement.