



# NL-7208-901PLED

## APPLICATIONS



## LAMP SUITABILITY



## DIMENSIONS

### Luminaire

Max. Width 90mm	Max. Length 175mm	Max. Depth. 65mm
--------------------	----------------------	---------------------

## ORDER CODE

LUMINAIRE CODE	LAMP TYPE	OPTICS
NL-7208-901PLED-CW	9 Nos 1W LED-CW	30Deg. Beam

## MOUNTING SUITABILITY

RECESSED IN WALL  
RECESSED IN FLOOR

## DESCRIPTION

### 'NOVA'

INGROUND / UNDER WATER LUMINAIRE-RECTANGULAR

Material of construction: Marine Grade 304, Stainless steel  
Stainless steel housing, duly machined and polished. SS Flange, .



With Power LED lamps , mounted on an aluminium sandwiched PCB board, The luminaire shall be provided with internal thermal management heat sink for LED junction Temperature . Suitable for operation on constant current driver.

Toughened glass diffuser , silicone sealed to ensure complete water ingress protection.IP68

Non hygroscopic copper wire PVC sheathed cable of adequate length is provided. Cable exit through water proof sealed gland.

Additional housing for wall / floor embedded mounting

Remote Heavy duty electronic LED Driver recommended .  
Driver to separate detail.

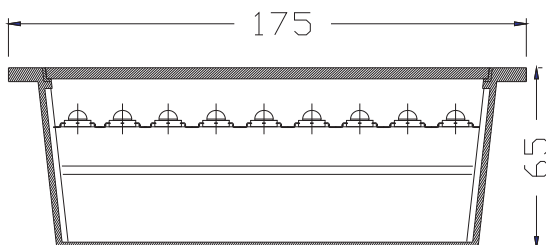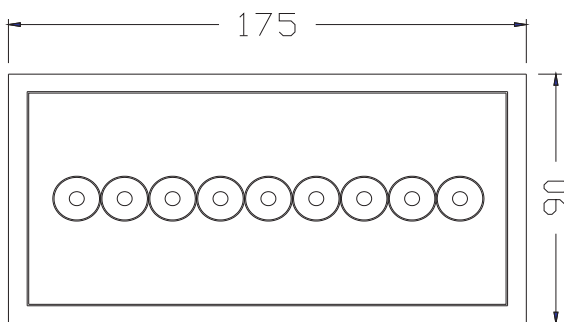

UNDERWATER LIGHTING

UW-04

NOVA-LEDs  
Energreen Lighting

## NOTE